


Column Formwork becomes even more flexible

AluFix Column Panel

NEW

AluFix column panels in height of 150 and 300 cm allow inch-perfect shuttering for column cross-sections in 5 cm increments up to max. 60 x 60 cm side length.

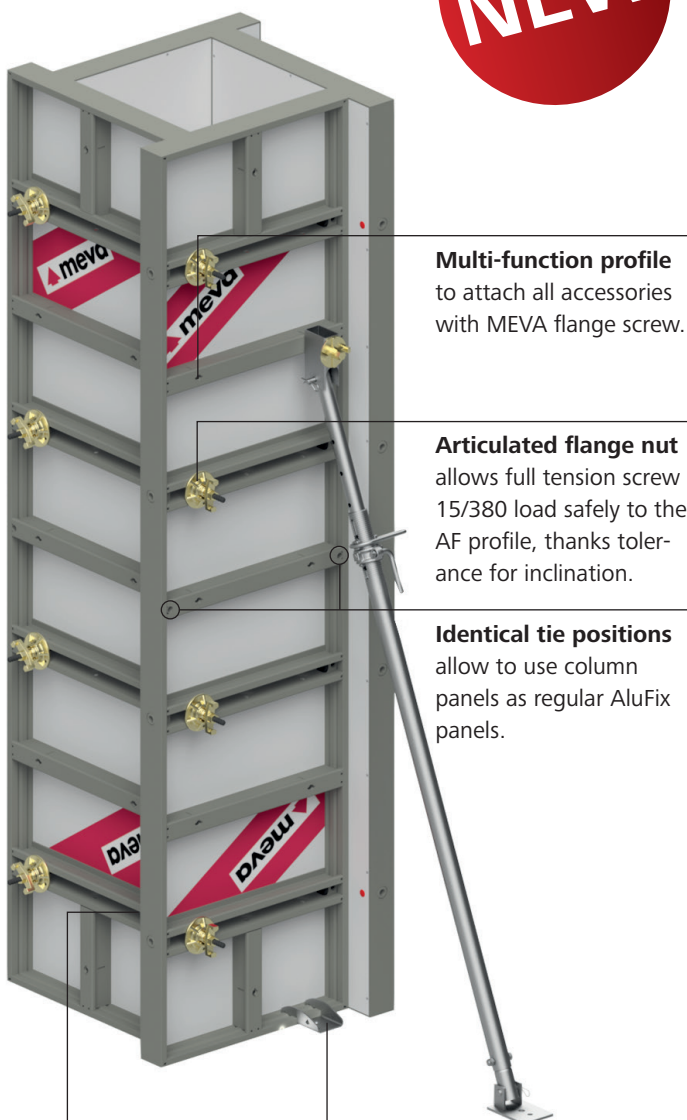

Multi-function profile to attach all accessories with MEVA flange screw.

Articulated flange nut allows full tension screw 15/380 load safely to the AF profile, thanks tolerance for inclination.

Identical tie positions allow to use column panels as regular AluFix panels.

Tension screw AF/EF 15 with articulated flange nut to connect 2 panels to form an external corner.

Shoe plate 23 for preventing uplift of the formwork.



i

Simply smart

→ Performance

- Columns: Permissible fresh concrete pressure over full surface 75 kN/m² with 4 tie rows when used with push-pull prop and shoe plate
- Regular: Permissible fresh concrete pressure over full surface 50 kN/m² with 3 tie rows

→ Flexibility

- Column panels 300/75 and 150/75 can be used as regular AluFix panels thanks to identical tie position
- Columns with cross-section in increments of 5 cm to max. 60 cm possible
- Crane-independent; 20,70 kg/m²

→ Smart multi-function profile

- Features welded-in DW-15 nuts
- All accessories, e.g. brackets, push-pull props and alignment rails, attached with MEVA flange screw

→ Sophisticated MEVA product design

- Center-punched panel rear side facilitates manual drilling on site
- Special alkus plug closes anchor holes with the same material and flush with the surface
- High-quality alkus all-plastic facing with long-term, 7-year warranty
- High-grade powder-coated finish with easy to clean surface
- Shoe plates for easy anchoring and preventing uplift of the formwork

Column Formwork becomes even more flexible

AluFix Column Panel



More user friendly

Center-punched panel rear side facilitates manual drilling of the tie holes.



Art. no	Description	Weight (kg)
22-134-20	AluFix AL 300/ 75 CP	54,70
22-135-20	AluFix AL 150/ 75 CP	28,30
23-311-97	Shoe Plate 23	0,95
29-900-10	Articulated Flange Nut 15/120	1,81
X24-0001	Tension Screw AF/EF 15	1,12

Great Britain

MEVA Formwork Systems Ltd.
 Unit 9 Ninian Park
 Ninian Way, Wilnecote
 Tamworth, Staffordshire, B79 7TA
 Tel. +44 1827 60217
 Fax +44 1827 60260

uk@meva.net

Subsidiaries/international bases



MEVA Schalungs-Systeme GmbH

Industriestrasse 5 Tel. +49 7456 692-01
 72221 Haiterbach Fax +49 7456 692-66
 Germany info@meva.net

www.meva.net

AE-Dubai Tel. +971 4 8042200
 AT-Pfaffstätten Tel. +43 2252 20900-0
 AU-Adelaide Tel. +61 8 82634377
 BE-Landen Tel. +32 11 717040
 BH-Riffa Tel. +973 3322 4290
 CA-Toronto Tel. +1 416 8565560
 CH-Seon Tel. +41 62 7697100
 FR-Sarreguemines Tel. +33 387 959938
 GB-Tamworth Tel. +44 1827 60217
 HU-Budapest Tel. +36 1 2722222
 IN-Mumbai Tel. +91 22 27563430
 LATAM latam@meva.net

LU-Rodange Tel. +352 20 283747
 MA-Casablanca Tel. +212 684-602243
 MY-Perak Tel. +60 12 5209337
 NL-Gouda Tel. +31 182 570770
 NO-Oslo Tel. +47 67 154200
 NORDIC Tel. +45 2043 1855
 PA-Panama City Tel. +507 2372222
 PH-Manila Tel. +63 998 5416975
 QA-Doha Tel. +974 4436 6742
 SG-Singapore Tel. +65 6992 8000
 US-Springfield Tel. +1 937 3280022